



- Latest generation infrared technology
- Ultra HD resolution
- Anti-glare glass
- Optical bonding
- Easyfix Proximity Sensor (optional)
- Easyfix Video Conferencing Unit (optional)
- Android onboard
- Integrated Legamaster appstore
- Integrated AirServer software

## ETX PLUS touch monitor

### ETX-8620-PLUS


- Razor-sharp, high-quality images in Ultra-HD
- Slim appearance with a high build quality and thin bezels
- One-button operation, prominently located on the front bezel, enables fast and efficient access to the main menu
- State-of-the-art screen mirroring from laptops, tablets and phones with the AirServer software that has been pre-programmed on the ETX e-Screens
- Incredible versatility due to the embedded Android environment, with access to millions of applications through the app store
- Extend the platform with the software you want, by using a Legamaster OPS computer. Or simply connect a laptop or desktop computer
- Full line of (electrical height-adjustable) mounting solutions and matching accessories, like the Easyfix Video Conferencing Unit and the Easyfix Proximity Sensor, to easily upgrade your system and use its full potential in schools, universities and office buildings
- The latest generation high-precision infrared touch system offers 32 touch-points and a fast-as-lightning touch experience
- Provided with an optically bonded screen for the finest touch experience. The screens eliminate any parallax-effects, reduce reflections and make sure your finger or stylus interacts more precisely

### Recommended accessories

- Sessions software license full  
Ref.:7-197062-1
- Soundbar LS2000 Ref.:7-198121
- OPS computer OPS KL-i700 W10  
Ref.:7-861322-03

Ref.: **7-803120-86P**  
EAN: **8713797092814**



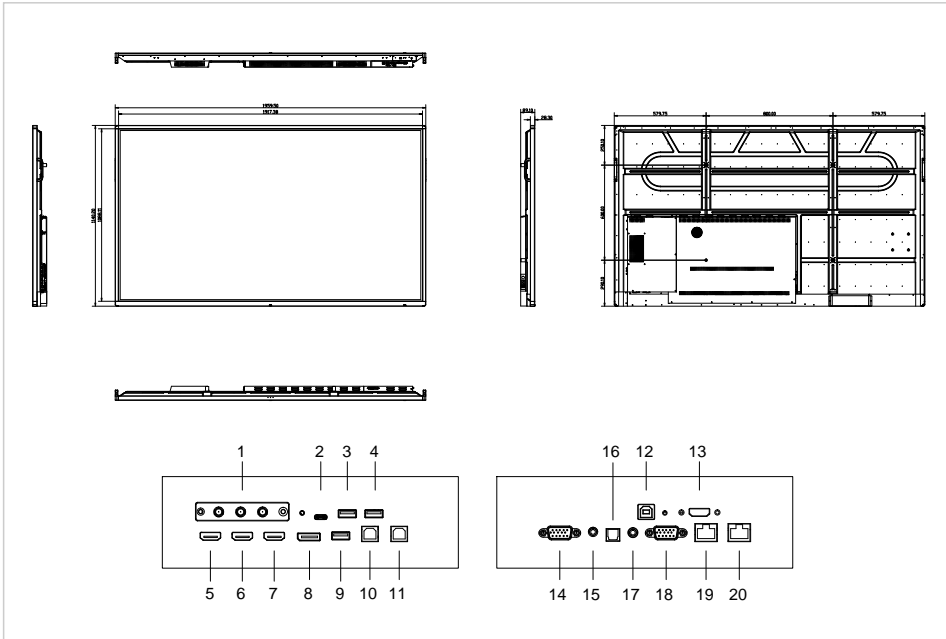

1	Wi-Fi module
2	USB-C
3	USB-A 3.0
4	USB-A 3.0
5	HDMI out
6	HDMI (ARC) 1
7	HDMI 2
8	DisplayPort
9	USB-A 2.0
10	Touch USB 1
11	Touch USB 2
12	Touch USB 3
13	HDMI 3
14	VGA (PC)
15	PC audio in
16	SPDIF
17	Audio out
18	RS232
19	LAN
20	LAN

## Specifications

Viewing angle max	H: 178 ° / V: 178 °°
Brightness	350 cd/m <sup>2</sup>
Contrast ratio static / dynamic	1200:1 / 5000:1
Response time	8 ms
Supported colours	1073,3M
Display resolution / refresh rate	3840 x 2160 / 60 Hz
Input resolution / refresh rate	3840 x 2160 / 60 Hz
Ops slot	yes
Fanless design	yes
Display control	Touch OSD, Keypad, RS-232C, IR remote controller
Automatic brightness adjustment	yes
Speaker	3x15W
Power consumption / Standby	360 / 0.5 (Watt)
Durability / Lifespan	16/7 / 40000 hours
Input connectors	HDMI (3x),DisplayPort,USB-A 3.0 (3x),USB-A 2.0,USB-C,VGA,PC audio-in,Ethernet (2x)
Output connectors	HDMI,mini-toslink,Audio line-out
Touch technology	Advanced infra-red touch technology
Touch operation	Finger, Glove, Stylus
Number of touch points	32
Driver	Win: plug and play (optional driver) / Mac: driver
Sup. operating systems	Android,Linux,Mac OSX,Windows 10,Windows 8.1

## Logistics

Quantity	1
Packing dimensions	288 x 2110 x 1300 (mm)
Weight (gross/net)	75.00 kg / 64.00 kg