



- Latest generation infrared technology
- Ultra HD resolution
- Anti-glare glass
- Easyfix Proximity Sensor (optional)
- Easyfix Video Conferencing Unit (optional)
- Android onboard
- Integrated Legamaster appstore
- Integrated AirServer software

ETX touch monitor

ETX-6520

- Razor-sharp, high-quality images in Ultra-HD
- Slim appearance with a high build quality and thin bezels
- One-button operation, prominently located on the front bezel, enables fast and efficient access to the main menu
- State-of-the-art screen mirroring from laptops, tablets and phones with the AirServer software that has been pre-programmed on the ETX e-Screens
- Incredible versatility due to the embedded Android environment, with access to millions of applications through the app store
- Extend the platform with the software you want, by using a Legamaster OPS computer. Or simply connect a laptop or desktop computer
- Full line of (electrical height-adjustable) mounting solutions and matching accessories, like the Easyfix Video Conferencing Unit and the Easyfix Proximity Sensor, to easily upgrade your system and use its full potential in schools, universities and office buildings
- The latest generation high-precision infrared touch system offers 32 touch-points and a fast-as-lightning touch experience


Recommended accessories

- Sessions software license full
Ref.:7-197062-1
- Soundbar LS2000 Ref.:7-198121
- OPS computer OPS KL-i700 W10
Ref.:7-861322-03

Ref.: **7-803120-65**

EAN: **8713797092487**



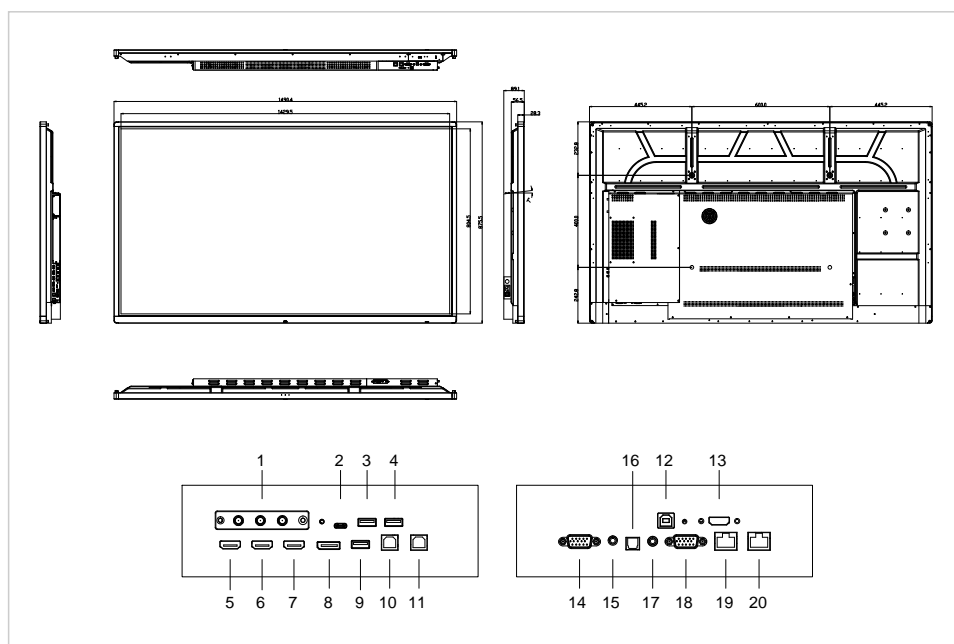

| | |
|----|--------------|
| 1 | Wi-Fi module |
| 2 | USB-C |
| 3 | USB-A 3.0 |
| 4 | USB-A 3.0 |
| 5 | HDMI out |
| 6 | HDMI (ARC) 1 |
| 7 | HDMI 2 |
| 8 | DisplayPort |
| 9 | USB-A 2.0 |
| 10 | Touch USB 1 |
| 11 | Touch USB 2 |
| 12 | Touch USB 3 |
| 13 | HDMI 3 |
| 14 | VGA (PC) |
| 15 | PC audio in |
| 16 | SPDIF |
| 17 | Audio out |
| 18 | RS232 |
| 19 | LAN |
| 20 | LAN |

Specifications

| | |
|-----------------------------------|--|
| Viewing angle max | H: 178 ° / V: 178 °° |
| Brightness | 350 cd/m ² |
| Contrast ratio static / dynamic | 4000:1 / 5000:1 |
| Response time | 9 ms |
| Supported colours | 1073,3M |
| Display resolution / refresh rate | 3840 x 2160 / 60 Hz |
| Input resolution / refresh rate | 3840 x 2160 / 60 Hz |
| Ops slot | yes |
| Fanless design | yes |
| Display control | Touch OSD, Keypad, RS-232C, IR remote controller |
| Automatic brightness adjustment | yes |
| Speaker | 3x15W |
| Power consumption / Standby | 160 / 0.5 (Watt) |
| Durability / Lifespan | 16/7 / 40000 hours |
| Input connectors | HDMI (3x),DisplayPort,USB-A 3.0 (3x),USB-A 2.0,USB-C,VGA,PC audio-in,Ethernet (2x) |
| Output connectors | HDMI,mini-toslink,Audio line-out |
| Touch technology | Advanced infra-red touch technology |
| Touch operation | Finger, Glove, Stylus |
| Number of touch points | 32 |
| Driver | Win: plug and play (optional driver) / Mac: driver |
| Sup. operating systems | Android,Linux,Mac OSX,Windows 10,Windows 8.1 |

Logistics

| | |
|--------------------|------------------------|
| Packing dimensions | 228 x 1665 x 1079 (mm) |
| Weight (gross/net) | 56.00 kg / 43.00 kg |